

SPECIFICATION CONTENT LIST

1. SPECIFICATION ELECTRICAL CHARACTERISTICS.....
2. CONNECTOR PIN ASSIGNMENT.....
3. TEST CIRCUIT&MEASURING INSTRUMENTS/**NONE**.....
4. MECHANICAL CHARACTERISTIC/.....
5. CIRCUIT/**NONE**.....
6. BOM LOCATION LIST/**NONE**.....
7. PCB LAYOUT/.....
8. TRANSFORMERS SPECIFICATION/**NONE**.....

ATBEL TECHNOLOGY CORP.,

5F. NO. 103, Ruihu St., Neihu District, TaipeiCity 114, Taiwan (R.O.C)

Tel : 886-2-8751-8083 Ext : 100 Fax : 886-2-8751-2032

e-mail : johnson_hsieh@atbel.com.tw

<http://www.atbel.com.tw>

Model : AB-B502-16L35M : TWO LAMPS

DC TO AC INVERTER SPECIFICATION

The DC to AC inverter is designed as a low noise, high frequency, high efficiency and as a low profile efficiency and light weight switching power supply.

1. Features

- (1) Constant current output to control brightness.
- (2) Auto shut off during.
- (3) High Performance, High Efficiency.
- (4) Fixed output frequency does not effect by brightness adjustment

2. Application

LCD Type	LCD Part No	Brandh	Remark
15"	G150XG03 V.1	AU	
	G150X1-L02	Chi Mei	

3. Operating Conditions

Item	Mark	Condition	Min	Max	Unit	Remark
Operating Temperature	Top	Ha=90% RH under	0	65	°C	
Storage Temperature	Tstg	Ha=95% RH under	-10	80	°C	
Operating Humidity	Hop	Ta=0~65°C	20	90	% RH	
Storage Humidity	Hstg	Ta=20~80°C	-	95	% RH	

4. Operating Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
Input Voltage	Vin	GND=0V	10.8	12	13.2	V	
Input Current (Low Brightness)	I in L	Vin=TYP.±1% ON VR=MIN (Iout=MIN)	200	250	300	mA	
Input Current (High Brightness)	I in H	Vin=TYP.±1% ON VR=MAX (Iout=MAX)	800	850	900	mA	
Lamp Current (Low Brightness)	I out L	Vin=TYP.±1% ON VR=MIN (Iout=MIN)	0.5	0.8	1.0	mA rms	
Lamp Current (High Brightness)	I out H	Vin=TYP.±1% ON VR=MAX (Iout=MAX)	5.5	6	6.5	mA rms	
Working Frequency			38	41	43	KHZ	
Output Voltage		CCFT Current=5mA	-	700	-	V	
Brightness Control		Connection of Voltage	5	-	0	V	

Model : AB-B502-16L35M : TWO LAMPS

DC TO AC INVERTER SPECIFICATION

5. Connection pin assignment

5-1. (P1) Input Connector: 5 Pins , Pitch:2.0mm



PIN No	Symbol	Description
1	Vin	DC+12V
2	GND	Ground
3	Enable	ON/OFF control ON=+5V OFF=0V
4	Brightness	0~5Vdc control, 0V:Max , 5V:Min
5	GND	Ground

5-2 (P2&P3) Output Connector

PIN No	Symbol	Description
1	Output	Lamp High Voltage
2	Output	Lamp Low Voltage

5-3 Connector Model No & Brand

Connector No.	Connector Model No	Brand
P1	2003P05SOT	LANDWIN
P2	40020210T	LANDWIN
P3	40020210T	LANDWIN

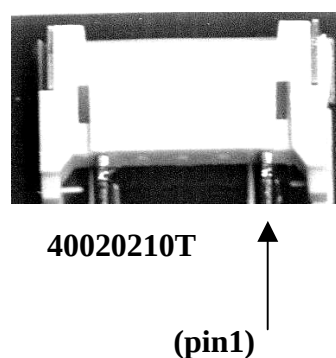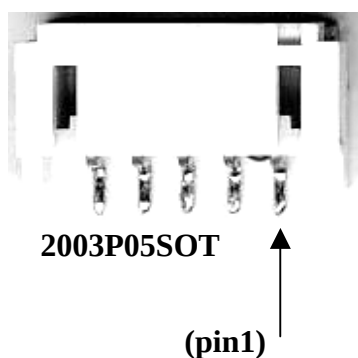

6. Mechanical Characteristics

Dimension: 147mm * 25mm * 9.5mm

Weight: MAX. 20g

MODEL : AB-B502-16L35M : TWO LAMPS
DC TO AC INVERTER SPECIFICATION

PCB Dimension & Screw Hole Location (Diameter 3mm):

Screw hole = 3.0mm

Please see fig-3


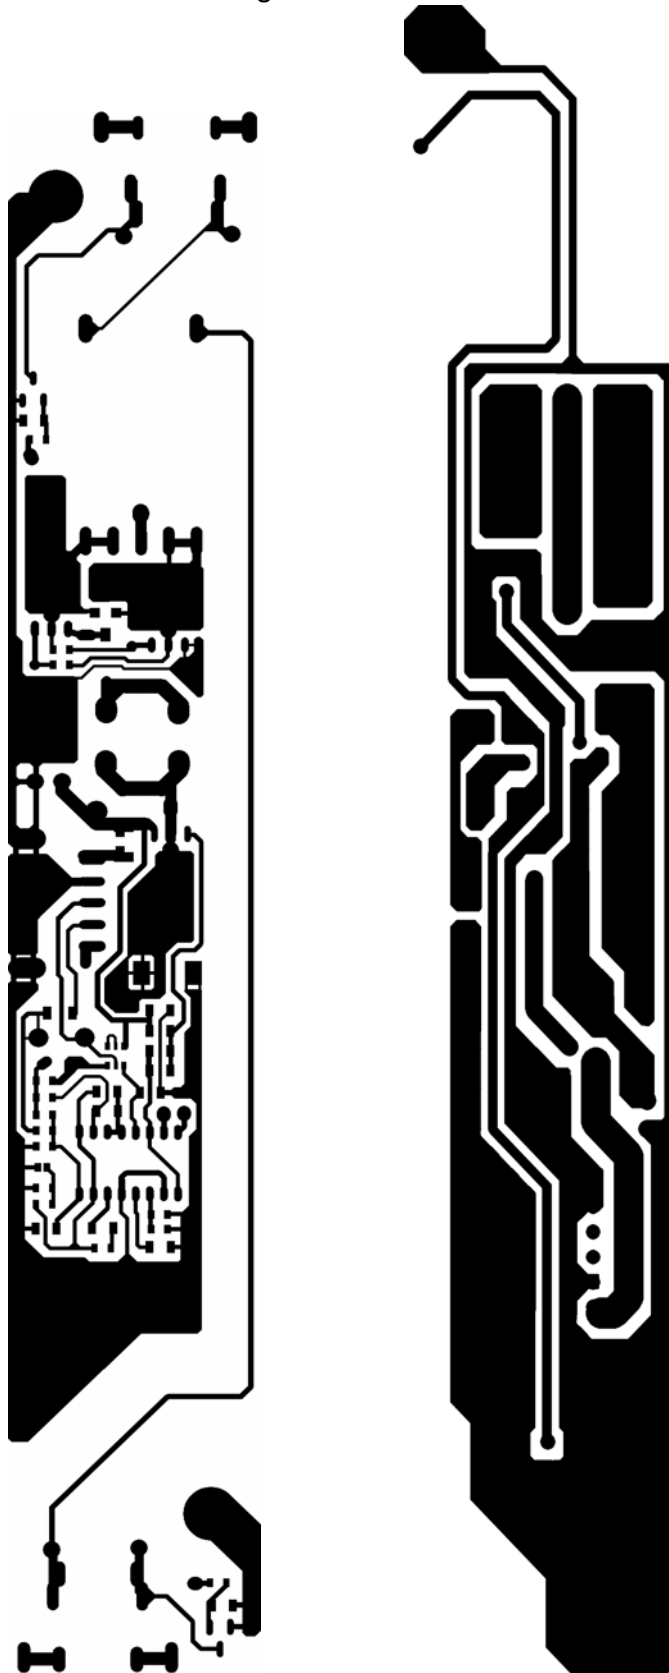


fig-1

fig-2

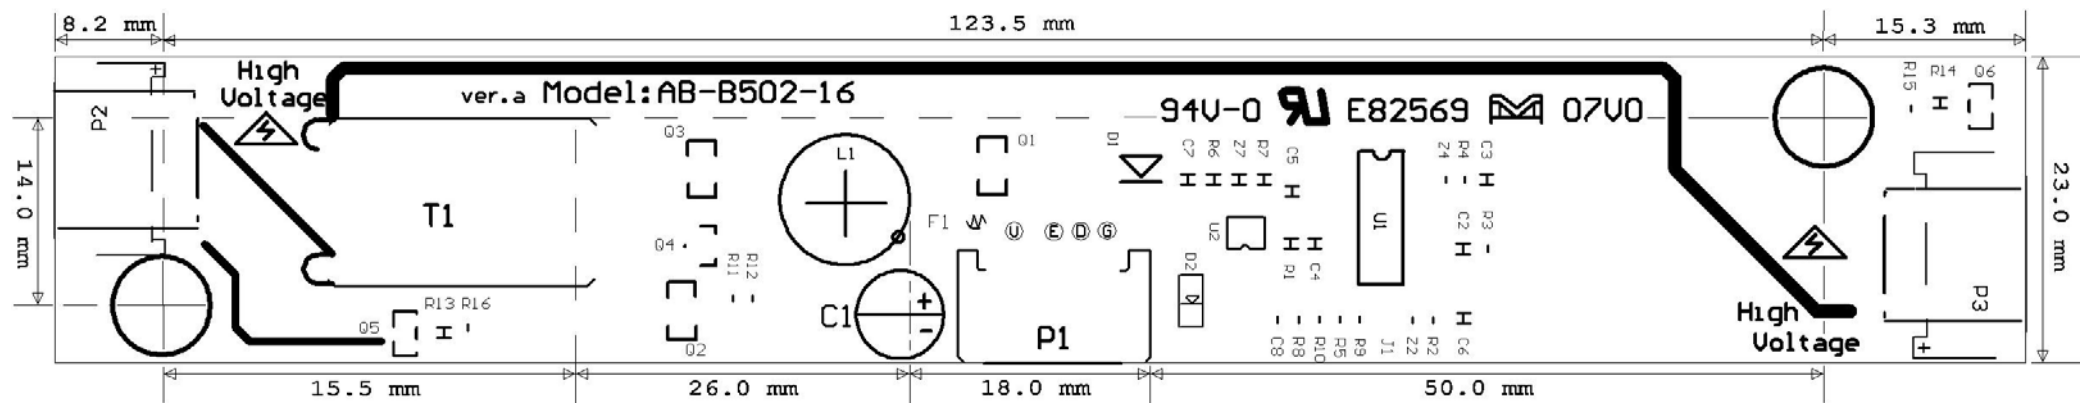

1. Screw hole Dimension : 3.0 mm
2. P1 : L * W * H : 14.0 mm * 7.5 mm * 6.0 mm
3. L1 : L * W * H : 10.0 mm * 9.0 mm * 6.0 mm
4. T1 : L * W * H : 15.5 mm * 15.5 mm * 8.5 mm (core size)
5. U1 : Height 2.2 mm
6. P2 & P3 : L * W * H : 14.0 mm * 8.0 mm * 4.0 mm

fig-3 Printing Layer