

2 Elements High Current Series

ACPA 16D5 Ø15.5mm, 4.8mm long

SPECIFICATION

Model Name	DC Breakdown Voltage	Maximum Impulse Breakdown Voltage		Maximum Impulse Discharge Current		Follow Current at 50/60Hz	Max Continuous Operating Voltage 50/60Hz	Minimum Insulation Resistance	Breakdown time	Maximum Capacitance
	(V)	(V)		(8/20 μ s)	(KA)					
	100V/s	1KV/ μ s	1.2/50us 6KV	1 time	10 times	(A)	(V)	(G Ω)	(ns)	1MHZ
16D5-150*	120-180	600	1100	40	20	—	52 ⁽¹⁾	1	<100	4
16D5-230*	184-276	700	1100	40	20	—	95 ⁽¹⁾	1	<100	4
16D5-250*	200-300	700	1100	40	20	—	95 ⁽¹⁾	1	<100	4
16D5-300*	240-360	800	1200	40	20	50 ⁽¹⁾	130 ⁽¹⁾	1	<100	4
16D5-350*	280-420	800	1200	40	20	50 ⁽¹⁾	150 ⁽¹⁾	1	<100	4
16D5-500	400-600	—	1300	40	20	100 ⁽¹⁾	255 ⁽¹⁾	1	100	4
16D5-600	480-720	—	1400	40	20	100 ⁽¹⁾	255 ⁽¹⁾	1	100	4
16D5-800	640-960	—	1500	40	20	100 ⁽¹⁾	255 ⁽¹⁾	1	100	4

NOTE

1 : UL1449 C-UL 4th Recognized, File E315423

2 : K3 產品無 (1) 此項要求

3 : *UL Pending

4 : DC Breakdown Voltage

150-350V


500-800V

DC Measuring Voltage


100V

250V


Dimensions

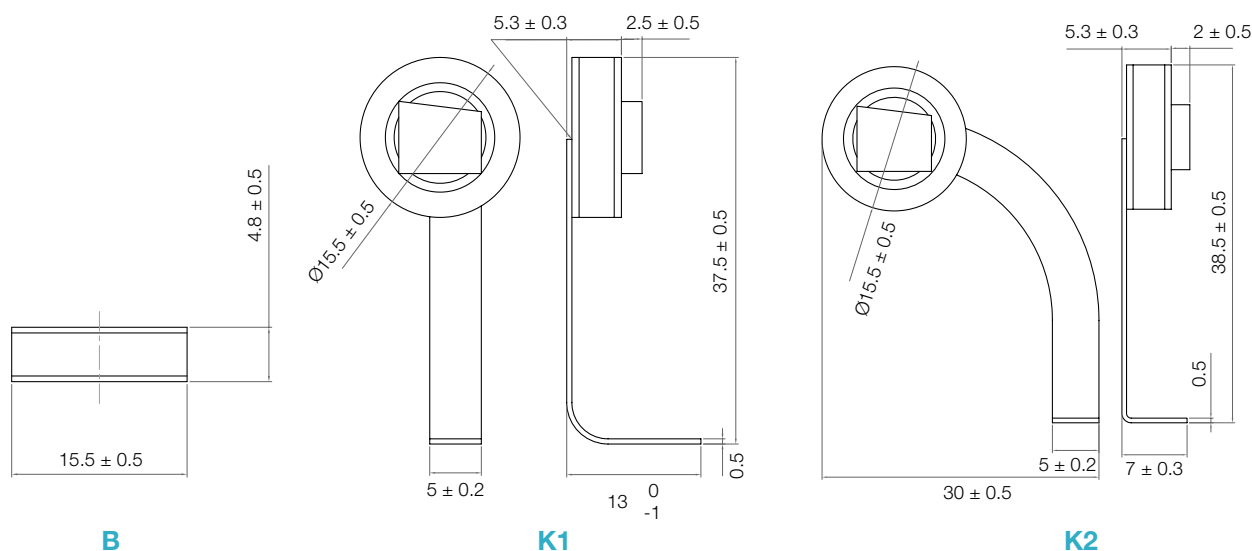


Dimensions

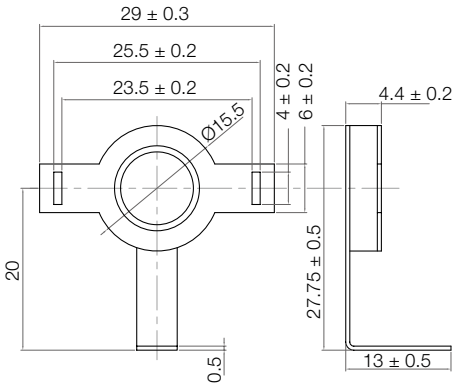


K3

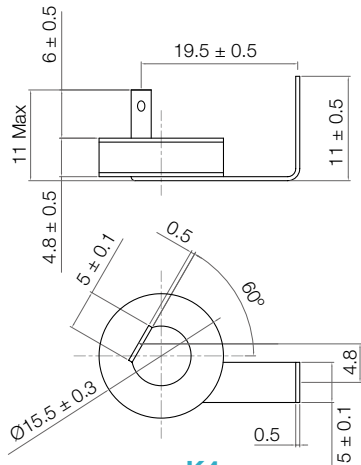


K4

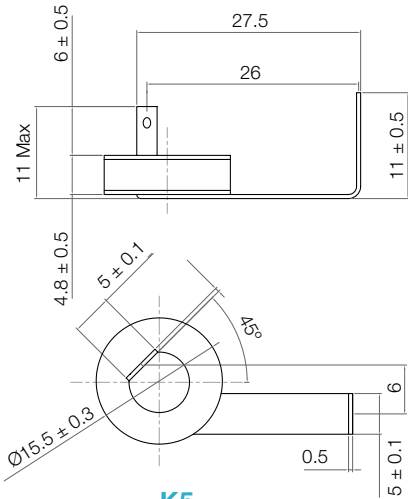

K5

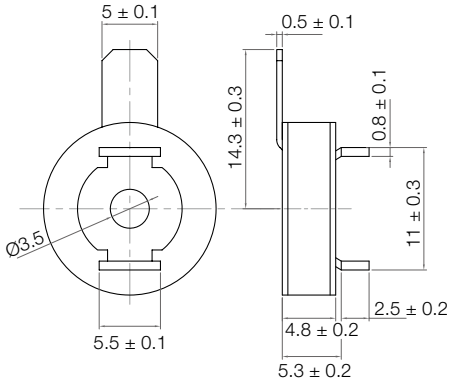

K6

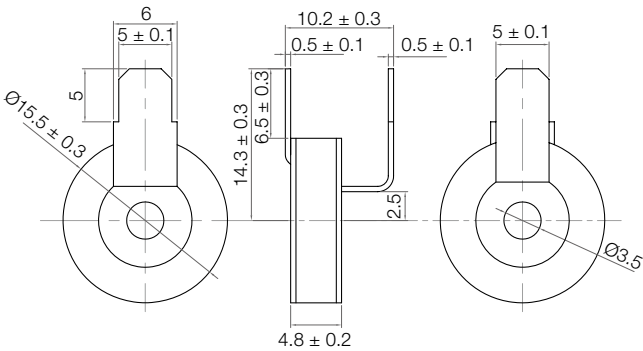

K7

Marking

