

2 Elements High Current Series

ACPA 18D7 Ø18.0mm, 6.7mm long

SPECIFICATION

Model Name	DC Breakdown Voltage	Maximum Impulse Breakdown Voltage	Maximum Impulse Discharge Current (8/20 μs) (KA)		Follow Current at 50/60Hz	Max Continuous Operating Voltage 50/60Hz	Minimum Insulation Resistance at 100Vdc	Breakdown time
	(V)	(V)	1 time	10 times	(A)	(V)	(GΩ)	(ns)
	100V/s	1KV/ μs					Note 2	
18D7-600	480-720	1300	60	40	100	255	1	100
18D7-800	640-960	1500	60	40	100	255	1	100


NOTE

1 : UL Pending

2 : DC Breakdown Voltage
600-800V

DC Measuring Voltage
250V

Dimensions Unit: mm

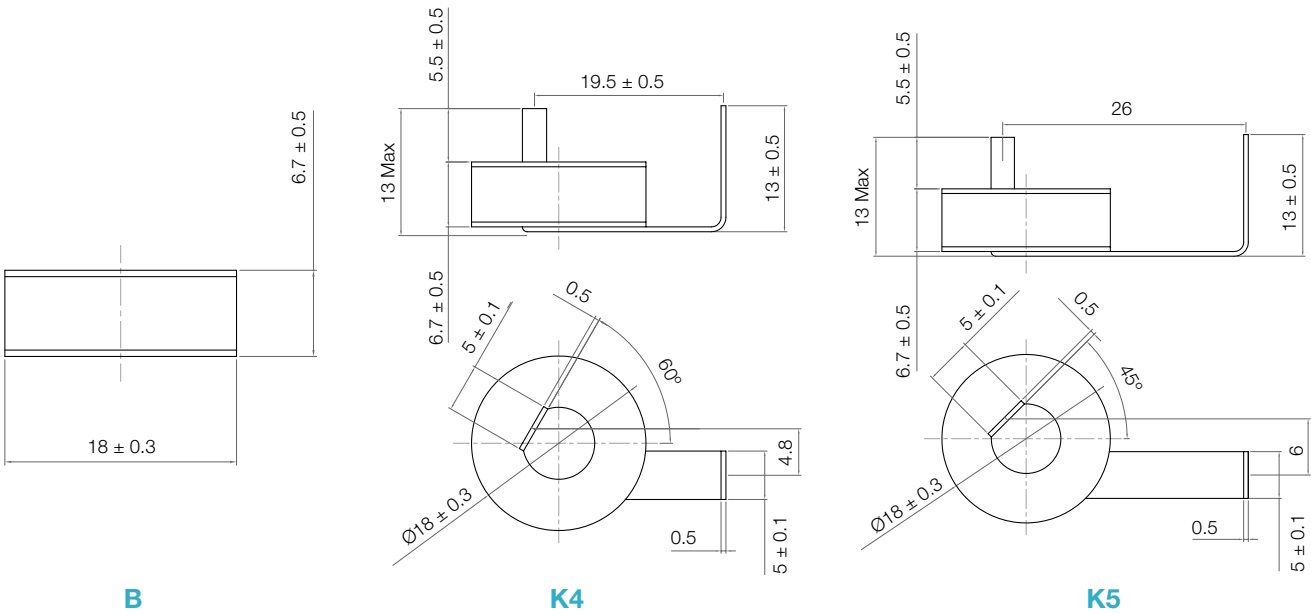

Marking

