

2 Elements High Current Series

ACPA 25D21M8 Ø25.0mm, 21.0mm long


SPECIFICATION

Model Name	DC Breakdown Voltage	Maximum Impulse Breakdown Voltage	Maximum Impulse Discharge Current (8/20 μs) (KA)		Follow Current at 50/60Hz	Max Continuous Operating Voltage 50/60Hz	Impulse Discharge Current	Minimum Insulation Resistance	Breakdown time	Maximum Capacitance
	(V)	(V)	1 time	10 times	(A)	(V)	(10/350 μs) (KA)	(GΩ)	(ns)	(pf)
25D21-500M8	400-600	1300	160	80	100	260	25	1	<100	4
25D21-600M8	480-720	1400	160	80	100	260	25	1	<100	4
25D21-800M8	640-960	1500	160	80	100	260	25	1	<100	4

NOTE

1 : UL Pending	2 : DC Breakdown Voltage 500-800V	DC Measuring Voltage 250V
----------------	--------------------------------------	------------------------------

Dimensions Unit: mm

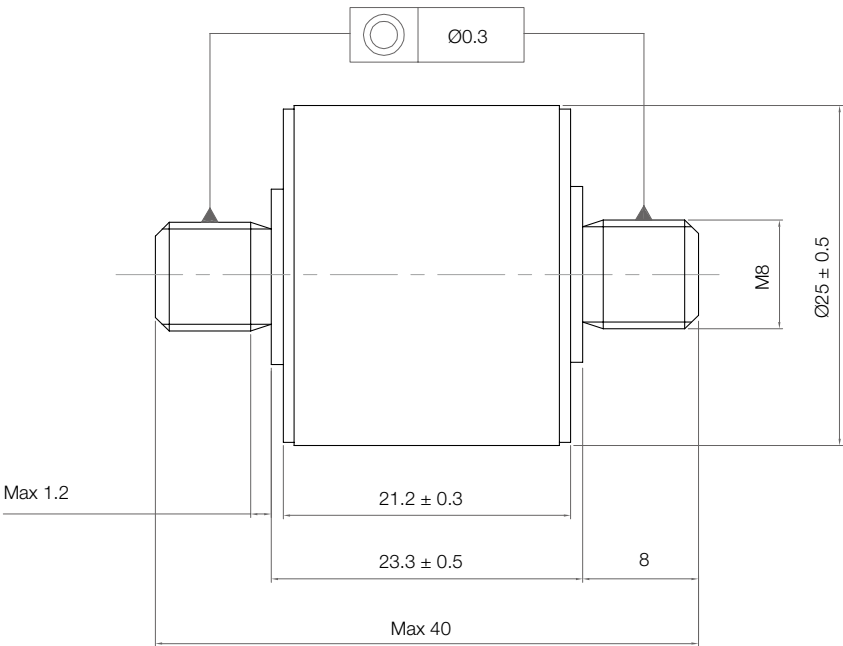

Marking

