

2 Elements Surface Mount Large Series

ACPA 2LS Ø8.3 mm, 6mm long

SPECIFICATION

Model Name	DC Breakdown Voltage	Maximum Impulse Breakdown Voltage		Maximum Impulse Discharge Current		Alternating Discharge Current		Impulse Life	DC Holdover Voltage	Minimum Insulation Resistance	Maximum Capacitance
	(V)	(V)	(V)	(8/20 μs) (kA)	(kA)	(A)	(A)	(10/1000μs) (100A)	(V)	(GΩ)	(pF)
	100V/s	100V/μs	1000V/μs	1 time	10 times	50Hz, 1sec	Single 9cycles	times	<150ms	Note 2	1MHZ
2LS070	70 ±20%	500	600	20	15	20	65	500	52	10	1.5
2LS075	75 ±20%	500	600	20	15	20	65	500	52	10	1.5
2LS090	90 ±20%	500	600	20	15	20	65	500	52	10	1.5
2LS120	120 ±20%	500	700	20	15	20	65	500	52	10	1.5
2LS130	130 ±20%	500	700	20	15	20	65	500	52	10	1.5
2LS145	145 ±20%	500	700	20	15	20	65	500	80	10	1.5
2LS230	230 ±20%	500	700	20	15	20	65	500	135	10	1.5
2LS250	250 ±20%	500	700	20	15	20	65	500	135	10	1.5
2LS300	300 ±15%	700	800	20	15	20	65	500	135	10	1.5
2LS350	350 ±15%	700	800	20	15	20	65	500	135	10	1.5
2LS400	400 ±15%	800	900	20	15	20	65	500	135	10	1.5
2LS470	470 ±15%	900	1000	20	15	20	65	500	135	10	1.5
2LS600	600 ±15%	1000	1100	20	15	20	65	500	135	10	1.5

NOTE

1 : UL pending

2 : DC Breakdown Voltage

DC Measuring Voltage

70-145V

50V

230-400V


100V

470-600V

250V

Dimensions

Unit: mm

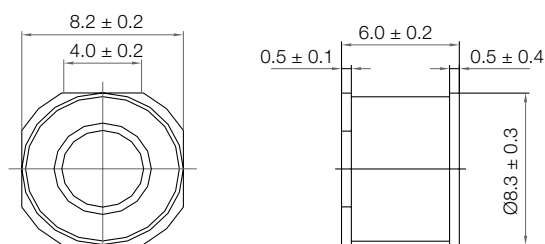

Recommended Pad Size

