

2 Elements Switching Series

ACPA 2T Ø8mm, 6mm long

SPECIFICATION

Model Name	Switching Voltage (V)	Maximum Ignition Frequency (HZ)	Switching Operations (times)	Minimum Insulation Resistance (GΩ) Note 3	Operation Temperature °C	Maximum Capacitance 0.1Vrms 1MHZ (pf)
2T350	350±10%	400	1×10 ⁵	1	-45 ~ 125	1
2T400	400±10%	400	1×10 ⁵	1	-45 ~ 125	1
2T470	470±10%	400	1×10 ⁵	1	-45 ~ 125	1
2T600	600±10%	400	1×10 ⁵	1	-45 ~ 125	1
2T800	800±10%	400	1×10 ⁵	1	-45 ~ 125	1
2T1000	1000±10%	400	1×10 ⁵	1	-45 ~ 125	1

NOTE

1 : UL497B Recognized, File E223314

2 : 2T800 and 2T1000 UL1449 C-UL 4th Recognized,
File E315423

3 : DC Breakdown Voltage

350-400V

470-800V

1000V

DC Measuring Voltage


100V

250V

500V

Dimensions Unit: mm

Item	Dimensions
D	8.0 + 0.3, -0.5
T	6.0 + 0.6, -0.1
d	0.8 ± 0.05
L	20min.

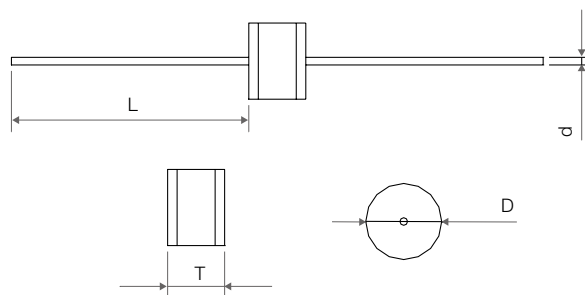

Basic Application Circuit

