

2 Elements High Current Series

ACPA 30D12 Ø29.7mm 12.4mm long

SPECIFICATION


Model Name	DC Breakdown Voltage	Maximum Impulse Breakdown Voltage	Maximum Impulse Discharge Current (8/20 μs) (KA)		Follow Current at 50/60Hz	Max Continuous Operating Voltage 50/60Hz	Minimum Insulation Resistance	Breakdown time
	(V)	(V)					(GΩ)	
	100V/s	1.2/50us 6KV	1 time	10 times			Note 2	
30D12-500	400-600	1300	160	100	100	255	1	<100
30D12- 600	480-720	1400	160	100	100	255	1	<100
30D12- 800	640-940	1500	160	100	100	255	1	<100

Model Name	Impulse Discharge Current (10/350 μs) (KA)	Impulse Discharge Current (10/350 μs & 8/20 μs) (KV)	Maximum Capacitance
			(pf)
			1MHZ
30D12- 500	40	6	10
30D12- 600	40	6	10
30D12- 800	40	6	10

NOTE

1 : UL1449 C-UL 4th Recognized, File E315423	2 : DC Breakdown Voltage 500-800V	DC Measuring Voltage 250V
--	-----------------------------------	---------------------------

Dimensions Unit: mm

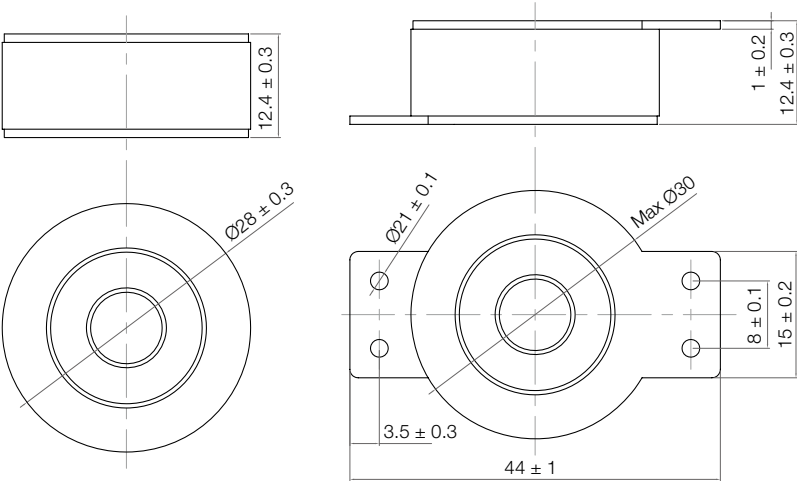

Marking

