

2 Elements Surface Mount Chip Series

ACPA 3216 L3.2 x W1.6 x H1.6mm


SPECIFICATION

Model	DC Breakdown Voltage	Impulse Discharge Current	Alternating Discharge Current	Impulse Life Test	Insulation Resistance	Capacitance (1MHz 1V)
3216-120LF	84~156	8/20 us 500A Positive/Negative 5 Times	50Hz 1s 0.5A 10Times	8/20 us 50A 300Times	100MΩ Min	0.3pF Max.
3216-150LF	105~195					
3216-200LF	140~260					
3216-400LF	280~520					
3216-420LF	294~546					
3216-500LF	350~650					
3216-600LF	420~780					

NOTE

1 : UL1449 C-UL 4th Recognized, File E315423; 120V UL pending	2 : DC Breakdown Voltage	DC Measuring Voltage
	50V	50V
	200-400V	100V
	420-600V	250V

Dimensions Unit: mm

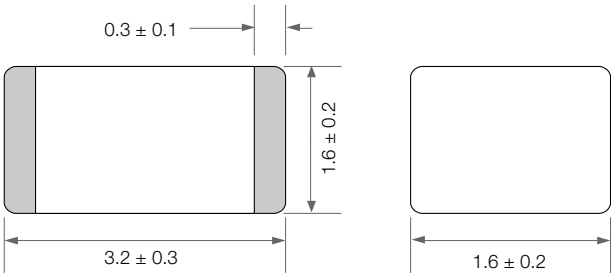

Marking



Recommended Pad Size

