

2 Elements Surface Mount Chip Series

ACPA 4532 L4.5 x W3.2 x H2.7mm


SPECIFICATION

Model	DC Breakdown Voltage	Impulse Discharge Current	Impulse Withstanding Voltage Capacity	Impulse Life Test	Insulation Resistance	Capacitance (1MHz 1V)
4532-075LF	55~95	8/20 us 2000A Positive/Negative 5 Times	10/700 us 6kV Positive/Negative 5 Times	8/20 us 100A 300Times	100MΩ Min	0.5pF Max.
4532-090LF	63~117					
4532-120LF	84~156					
4532-150LF	105~195					
4532-200LF	140~260					
4532-230LF	161~299					
4532-300LF	210~390					
4532-350LF	245~455					
4532-400LF	280~520					
4532-420LF	294~546					
4532-470LF	329~611					
4532-500LF	350~650					
4532-600LF	420~780					

NOTE

1 : UL497B Recognized, File E223314	2 : DC Breakdown Voltage	DC Measuring Voltage
	75-150V	50V
	200-400V	100V
	420-600V	250V

Dimensions Unit: mm

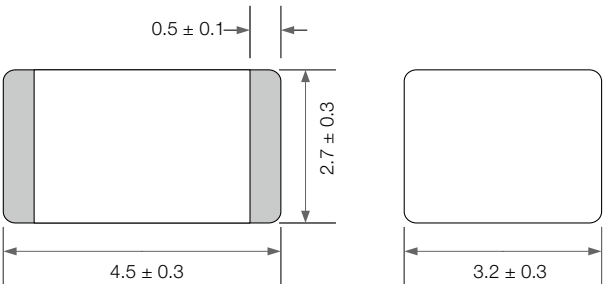

Marking



Recommended Pad Size

